



IN THE UNITED STATES
PATENT AND TRADEMARK OFFICE

~~88~~ 0360
4-11
#5

PATENT APPLICATION

Geert Arnout Awater
D. J. Richard Van Nee

CASE 6-14

Serial No. 09/848882

Group Art Unit

Filed May 4, 2001

Examiner

Title Decoding Techniques For Multi-Antenna Systems

ASSISTANT COMMISSIONER FOR PATENTS
WASHINGTON, D.C. 20231

SIR:


Enclosed is the certified copy of the European patent application in order to support a claim to priority on the above-subject U.S. patent application.

Respectfully,

Richard J. Botos
Richard J. Botos
Reg. No. 32,016
(908-582-3809)

Date: 6-29-01

Agere Systems Inc.
P.O. Box 614
Berkeley Heights, New Jersey 07922-0614

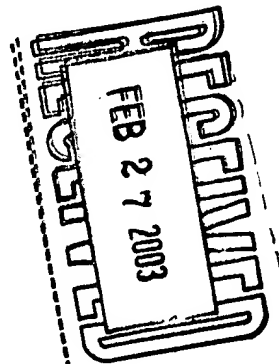

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231, on June 29, 2001

Patricia M. Holt
Date 6/29/01



THIS PAGE BLANK (USPTO)



(Printed at the end of the page)
as shown in the figure
not to be used
-fscW, ahu



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00303784.3

Der Präsident des Europäischen Patentamts;
Im Auftrag


For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

10/05/01



THIS PAGE BLANK (USPTO)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: 00303784.3

Anmeldetag:
Date of filing:
Date de dépôt: 05/05/00 ✓

Anmelder:
Applicant(s):
Demandeur(s):
LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636
UNITED STATES OF AMERICA

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Joint estimation using the M-algorithm or T-algorithm in multiantenna systems

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

H04L25/03

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

See for original title of the application
page 1 of the description.

THIS PAGE BLANK (USPTO)

Title: Decoding techniques for multi-antenna systems

The invention relates to a wireless radiofrequency data communication system comprising:

- a base-station comprising a multiple of N first groups and a signal processing-unit comprising memory means and processing means, wherein each first group comprises a receiver-unit provided with a receiver and at least one antenna which is connected to the receiver-unit, wherein the signal processing-unit is connected with each of the first groups for processing receive-signals generated by each of the first groups, and
 - a multiple of M second groups for transmitting radiofrequency signals to the first groups, wherein each second group comprises a transmitter-unit provided with a transmitter and at least one antenna which is connected to the transmitter-unit,
- wherein the memory means of the signal processing-unit are provided with information about the transfer-functions of radiofrequency signals from each of the antennas of the second groups to each of the antennas of the first groups, and wherein the transmitters and receivers operate on essentially the same radiofrequency or radiofrequency-band.

Wireless radiofrequency data communication systems of this type are known and find their applications in a variety of fields. An example of such an application can be found in the domain of digital communication for electronic-mail. In this application each personal computer can be provided with at least one second set so that the personal computer can be incorporated in an network. The base-station may in that case be connected with a server of the network. Further examples are given, for instance, in the domain of mobile telephony. In the case of mobile telephony the base-station is a telephony exchange. In the majority of the applications more than one second set wants to communicate with the base-station. This means that the second group transmits signals to this base-station and also receives signals from this

base-station. Since it would not be acceptable if all second groups would have to wait for each other's communication to be finished, there is a need for simultaneous communication. Simultaneous communication allows more second groups to
5 communicate at the same time with the base-station. A straightforward and common way of realising simultaneous communication is to assign different radiofrequencies to the respective second groups. In this way all data signals can be separated easily by the first groups in the base-station by
10 frequency selective filters. Furthermore, the base-station can communicate with each second group at the specific radiofrequency which has been assigned to the second group. A transmitted radiofrequency signal contains the actual information to be transmitted to the receiver. This actual
15 information has been modulated on the radiofrequency carrier-signal. Several techniques have been developed for modulating information on the carrier-signal like frequency-modulation, phase-modulation amplitude-modulation et cetera.

A radiofrequency signal which is transmitted by a
20 second group travels from the antenna of the second group along so-called travel-paths to the antennas of the first groups. During the travelling, depending of the specific travel-path, the radiofrequency signal is attenuated and also a phase-distortion is incurred on the radiofrequency signal.
25 The phase-distortion of the radiofrequency signal can be corrected by the signal processing-unit in the base-station on the basis of the information about the transfer-functions. This can be of special interest if information is modulated on the radio-frequency signal according to a phase-modulation
30 technique.

It is an object of the invention to provide in a detection system which increases the communication capacity of the wireless communication system per frequency or frequency-band used by the system. In particular it is an
35 object of the invention to increase the data communication capacity from the second groups to the first groups by

creating multiple separate simultaneous data communication channels. More in particular it is an object of the invention to provide in a detection system comprising M simultaneous separated communication signals for which the multiple of
5 first groups N may be less, equal or greater than the multiple M of second groups.

The present invention therefore provides in a wireless radiofrequency data communication system which is characterised in that the signal processing-unit is arranged
10 to process, in use, the receive-signals on the basis of the Maximum Likelihood Detection method, such that for each second group of the second groups an individual communication channel is formed with the base-station wherein these communication channels are generated simultaneously and
15 separately from each other.

In this manner multiple communication channels are realised on the same frequency, or within the same frequency-band, based on the principle that the signals can be separated thanks to the different characteristics of the
20 transfer-functions. Due to the Maximum Likelihood detection technique this holds for the cases wherein the number N of first groups is greater, equal or less than the number M of second groups. Hence the data communication capacity per frequency or frequency-band is indeed increased. The geometry
25 of the configuration of the communication system determines the transfer functions which belong to the different travel-paths between the antennas of the first groups and the second groups in the base-station. These transfer functions are expressed by complex numbers. Each complex number expresses
30 the transfer function between one antenna of one of the first groups and one antenna of the second group. The amplitude of the complex number is the attenuation of the signal's strength and the phase of the complex number is the phase modulation incurred during transmission along the travel-
35 path. Since the used frequencies are relatively high, the transfer functions depend largely on the configuration.

An embodiment according to the invention is characterised in that each transmitter comprises means for modulating an information signal on a radiofrequency signal according to the Quadrature Amplitude Modulation (QAM) method, wherein so-called QAM-symbols are transmitted, and that each receiver comprises means for demodulating information signals from a received radiofrequency signal. The Quadrature Amplitude Modulation is an amplitude- and/or phase-modulation technique in which information in binary format is modulated on a radiofrequency signal.

In a favourable embodiment of the invention the wireless communication system is characterised in that the signal processing-unit is arranged to calculate, in use, a detection signal x_{DET} according to

$$x_{DET} = \arg_{\text{over set}} \min(||r - H x_{SET}^p||), \quad (I)$$

where $\arg_{\text{over set}} \min(||\dots||)$ is a function which, according to (I), yields that vector x_{DET} out of a set X_{SET} of P vectors x_{SET}^p ($p=1, \dots, P$) for which the length $||r - H x_{SET}^p||$ of the complex N -dimensional vector $r - H x_{SET}^p$ is minimal, wherein r is a complex N -dimensional vector $[r_1, \dots, r_1, \dots, r_N]^T$ with r_i being the signal received by the i^{th} first group of the N first groups, H is a complex $[N * M]$ matrix containing transfer-functions h_{im} ($i=1, \dots, N$; $m=1, \dots, M$), wherein h_{im} is the transfer-function for transmission from the m^{th} second group of the M second groups to the i^{th} first group of the N first groups, and where x_{SET}^p is the p^{th} complex M -dimensional vector $[x_{SET, 1}^p, \dots, x_{SET, m}^p, \dots, x_{SET, M}^p]^T$ of the set X_{SET} , wherein the vectors x_{SET}^p in the set X_{SET} contain possible combinations of values which can be assigned by the second groups to an information signal x , where x is a M -dimensional vector $[x_1, \dots, x_m, \dots, x_M]^T$ with x_m being the information signal transmitted by the m^{th} second group of the M second groups to the first groups and where x_m is one individual communication signal. Equation (I) is based on the model

$$r = H x + n, \quad (II)$$

where \mathbf{n} is a complex N-dimensional noise vector
 $[\mathbf{n}_1, \dots, \mathbf{n}_1, \dots, \mathbf{n}_N]^T$ containing noise terms picked up during
 reception. The model (II) gives the relation between the
 5 transmitted signal $\mathbf{x} = [\mathbf{x}_1, \dots, \mathbf{x}_m, \dots, \mathbf{x}_M]^T$ and the received
 signal $\mathbf{r} = [\mathbf{r}_1, \dots, \mathbf{r}_1, \dots, \mathbf{r}_N]^T$ in the base-station. The
 detection method according to the invention tries to match a
 fixed number of possible combinations of values for \mathbf{x} in the
 equation (I). These possible value combinations are the
 10 vectors \mathbf{x}_{SET}^p , ($p=1, \dots, P$), which all together constitute the
 set \mathbf{X}_{SET} . The detection signal \mathbf{x}_{DET} is that vector \mathbf{x}_{SET}^p in the
 set \mathbf{X}_{SET} which minimizes the length of the vector $\mathbf{r} - \mathbf{H} \mathbf{x}_{SET}^p$.

In a further embodiment the wireless radiofrequency
 data communication system is characterised in that the
 15 processing unit is arranged to apply, in use, the following
 approximation (III) in the calculation of (I)

$$||\mathbf{r} - \mathbf{H} \mathbf{x}_{SET}^p|| = \sum_{i=1, \dots, N} (||\text{Real}([\mathbf{r} - \mathbf{H} \mathbf{x}_{SET}^p]_i)|| + ||\text{Im}([\mathbf{r} - \mathbf{H} \mathbf{x}_{SET}^p]_i)||), \quad (\text{III})$$

20

wherein $\sum_{i=1, \dots, N} (\dots)$ is a summation over the index i from 1
 to N over the argument $(||\text{Real}([\mathbf{r} - \mathbf{H} \mathbf{x}_{SET}^p]_i)|| +$
 $||\text{Im}([\mathbf{r} - \mathbf{H} \mathbf{x}_{SET}^p]_i)||)$, where $||(\dots)||$ yields the absolute value
 of its input argument and where $\text{Real}(\dots)$ is a function
 25 which, in equation (III), yields the real part of its complex
 argument $[\mathbf{r} - \mathbf{H} \mathbf{x}_{SET}^p]_i$, with $[\mathbf{r} - \mathbf{H} \mathbf{x}_{SET}^p]_i$ being the i^{th}
 component of the complex N-dimensional vector $\mathbf{r} - \mathbf{H} \mathbf{x}_{SET}^p$, and
 where $\text{Im}(\dots)$ is a function which, in equation (III), yields
 the imaginary part of its complex argument $[\mathbf{r} - \mathbf{H} \mathbf{x}_{SET}^p]_i$.
 30 The expression (III) offers a valuable approximation and
 simplification for the evaluation of equation (I).

An embodiment of the invention which is of special
 interest is a wireless radiofrequency data communication
 system characterised in that the set \mathbf{X}_{SET} comprises all
 35 possible combinations of values which can be assigned to the
 signal \mathbf{x} by the second groups.

In a preferred embodiment of the invention the wireless radiofrequency data communication system is characterised in that the signal processing-unit is arranged to find, in use, the detection signal x_{DET} according to a

5 Reduced Search Technique wherein a search-tree is passed through according to the following steps 1 to 7:

- Step 1: calculate the lengths of the complex vectors v corresponding to all combinations of possible values which can be assigned to $[x_1, \dots, x_L]$, wherein v is given by

$$10 \quad v = (r - \sum_{i=1, \dots, L} h_i * x_{\text{SET}, i}^p), \quad (\text{IV})$$

where $\sum_{i=1, \dots, L} (\dots)$ is a summation over the index i from 1 to L over the complex argument $[h_i * x_{\text{SET}, i}^p]$ and where h_i is the i^{th} column $[h_{1,i}, \dots, h_{N,i}]^T$ of the matrix H ;

- Step 2: select the K combinations of values for

15 $[x_{\text{SET}, 1}^p, \dots, x_{\text{SET}, L}^p]$ corresponding to the K smallest lengths of v as well as the K vectors v itself and set $m = L+1$;

- Step 3: calculate the lengths of the $C*K$ new vectors v given by

$$20 \quad v = v_{\text{old}} - h_m * x_{\text{SET}, m}^p, \quad (\text{V})$$

where v_{old} is one of the K vectors v resulting from the preceding step and where h_m is the m^{th} column of H ;

- Step 4: select those K combinations of values for $[x_{\text{SET}, 1}^p, \dots, x_{\text{SET}, m}^p]$ that correspond to the K smallest lengths of v as well as the K vectors v itself and set $m =$

25 $m_{\text{old}} + 1$, where m_{old} is m from the preceding step;

- Step 5: if $m < M$ then go to Step 3, else go to step 6;

- Step 6: calculate the lengths of the $C*K$ new vectors v given by

$$30 \quad v = v_{\text{old}} - h_M * x_{\text{SET}, M}^p, \quad (\text{VI})$$

- Step 7: the detection signal x_{DET} is determined as that combination of values $x_{\text{DET}} = [x_{\text{SET}, 1}^p, \dots, x_{\text{SET}, M}^p]$ which corresponds to the vector v with the smallest length,

wherein K and L are predetermined fixed integer values which control the size P of the set x_{SET} and wherein the

35 constellation size C of the system is the number of values $x_{\text{SET}, m}^p$ which can be assigned by one of the second groups to

one component x_m ($m=1, \dots, M$) of \mathbf{x} and where \mathbf{v}_{old} is one of the K vectors \mathbf{v} resulting from Step 3, the calculated detection signal \mathbf{x}_{DET} is the combination of values \mathbf{x}_{SET}^P corresponding to the smallest vector \mathbf{v} . In this manner the requisite number of
 5 calculations for obtaining the detection signal \mathbf{x}_{DET} is known on beforehand, since the number P of vectors in the set \mathbf{X}_{SET} is pre-determined by selecting values for K and L .

An alternative embodiment according to the invention is characterised in that the signal processing-unit is
 10 arranged to find, in use, the detection signal \mathbf{x}_{DET} according to a Reduced Search Technique wherein a search-tree is passed through according to the following steps 1 to 7:

- Step 1: calculate the values of the lengths of the C vectors \mathbf{v} according to the C possible values $\mathbf{x}_{SET, 1}^P$
 15
$$\mathbf{v} = (\mathbf{r} - \mathbf{h}_1 * \mathbf{x}_{SET, 1}^P), \quad (\text{VII})$$

wherein \mathbf{h}_1 is the first column of \mathbf{H} ;

- Step 2: select those combinations of values for $\mathbf{x}_{SET, 1}^P$ for which the lengths of \mathbf{v} are smaller than T , as well as the corresponding vectors \mathbf{v} and set $m=2$;
- 20 • Step 3: calculate the lengths of the new vectors \mathbf{v} given by

$$\mathbf{v} = \mathbf{v}_{old} - \mathbf{h}_m * \mathbf{x}_{SET, m}^P, \quad (\text{VIII})$$
 wherein \mathbf{v}_{old} is one of the vectors \mathbf{v} resulting from the preceding step and where \mathbf{h}_m is the m^{th} column of \mathbf{H} ,
 and adjust the threshold T ;
- 25 • Step 4: select those combinations of values for $[\mathbf{x}_{SET, 1}^P, \dots, \mathbf{x}_{SET, m}^P]$ for which \mathbf{v} is smaller than T , discard the other combinations and set $m = m_{old} + 1$, where m_{old} is m from the preceding step;
- Step 5: if $m < M$ then go to Step 3, else go to step 6,
- 30 • Step 6: calculate the lengths of the new vectors \mathbf{v} given by

$$\mathbf{v} = \mathbf{v}_{old} - \mathbf{h}_M * \mathbf{x}_{SET, M}^P, \quad (\text{IX})$$

- Step 7: the detection signal \mathbf{x}_{DET} is determined as that combination of values $\mathbf{x}_{DET} = [\mathbf{x}_{SET, 1}^P, \dots, \mathbf{x}_{SET, M}^P]$ which corresponds to the vector \mathbf{v} with the smallest length,
 35 wherein T is a predetermined fixed threshold value which controls the size P of the set \mathbf{X}_{SET} and wherein the

constellation size C of the system is the number of values $x_{\text{SET}, m}^p$ which can be assigned by one of the second groups to one component x_m ($m=1, \dots, M$) of \mathbf{x} , and wherein \mathbf{v}_{old} is one of the vectors \mathbf{v} resulting from step 3, the calculated detection signal \mathbf{x}_{DET} is the combination of values x_{SET}^p corresponding to the smallest vector \mathbf{v} . In this embodiment the number of requisite calculations for obtaining the detection signal \mathbf{x}_{DET} is not known on beforehand since the number of vectors \mathbf{v} which are selected in the respective steps 2 and 4 may vary from step to step, depending on the adjusted value for the threshold T and the noise \mathbf{n} in the signal \mathbf{r} .

A further embodiment of the wireless radiofrequency data communication system according to the invention is characterised in that the signal processing-unit is arranged to find, in use, the detection signal \mathbf{x}_{DET} according to a Reduced Search Technique which also comprises the following steps:

- **Step A1:** calculate an inner product z of the vector \mathbf{r} with the u^{th} column \mathbf{h}_u of the matrix \mathbf{H} , where u is an integer $1 \leq u \leq M$, according to:

$$z = \mathbf{h}_u^* \mathbf{r}, \quad (\text{X})$$

where \mathbf{h}_u^* is the complex conjugated and transposed of \mathbf{h}_u ;

- **Step A2:** calculate C^{M-1} terms Interf corresponding to all possible value combinations which can be assigned to $[x_1, \dots, x_{u-1}, x_{u+1}, \dots, x_M]$, wherein the terms Interf are defined according to:

$$\text{Interf} = \sum_{(i=1, \dots, M \wedge i \neq u)} x_i * (\mathbf{h}_u^* * \mathbf{h}_i), \quad (\text{XI})$$

wherein $\sum_{(i=1, \dots, M \wedge i \neq u)}$ is a summation over the index i from 1 to M with the exception of the integer u ;

- **Step A3:** estimate, on the basis of the equations (X), (XI) and z' according to:

$$z' = \text{Interf} + x_u * (\mathbf{h}_u^* * \mathbf{h}_u), \quad (\text{XII})$$

where z' is an approximation of z , the value for x_u corresponding to each of the value combinations $[x_1, \dots, x_{u-1}, x_{u+1}, \dots, x_M]$, and constitute a test set \mathbf{x}_{SET} comprising C^{M-1} vectors x_{SET}^p , wherein each vector

x_{SET}^p represents a value combination

$[x_1, \dots, x_{u-1}, x_u, x_{u+1}, \dots, x_M];$

- **Step A4:** determine the detection signal x_{DET} according to equation (A), wherein the test set is defined with the C^{M-1} vectors x_{SET}^p from the preceding step.

In an embodiment of the wireless radiofrequency data communication system according to the invention the multiple N of first groups exceeds the multiple M of second groups.

In another embodiment of the wireless radiofrequency data communication system according to the invention the multiple N of first groups is less than the multiple M of second groups.

In still another embodiment of the wireless radiofrequency data communication system according to the invention the multiple N of first groups is equal to the multiple M of second groups.

In the accompanying drawings, in which certain modes of carrying out the present invention are shown for illustrative purposes:

Figure 1 is a diagram schematically showing a wireless data communication system according to the invention;

Figure 2 is a diagram illustrating the use of Quadrature Amplitude Modulation (QAM) symbols by the wireless data communication system of figure 1.

Figure 3 is a diagram illustrating the use of Quadrature Amplitude Modulation (QAM) symbols by a wireless data communication system which contains three first groups and two second groups.

Figure 4 is a diagram illustrating the use of Quadrature Amplitude Modulation (QAM) symbols by a wireless data communication system which contains one first group and two second groups.

Figure 5 is a diagram showing a search tree for illustrating the principle of Reduced Search Techniques in an

embodiment of a wireless data communication system according to the invention.

An embodiment of a wireless radiofrequency data communication system according to the invention is shown in figure 1. This wireless radiofrequency data communication system comprises a base-station 2 which comprises a signal processing-unit 4 and multiple first groups 6.i (i=1,2,...,N). Each first group 6.i comprises a receiver-unit 10.i provided with a receiver, and at least one antenna 12.i which is connected to the receiver-unit 10.i. In this example each first group 6.i comprises one antenna 12.i connected to the receiver-unit 10.i. The signal processing-unit 4 is at one side connected to each of the first groups 6.i, i=1,2,...,N, and at another side connected to each of the coding/decoding-units 14.m, m=1,2,...,M. Furthermore, the system comprises multiple second groups 16.m (m=1,2,...,M), wherein each second group 16.m comprises at least a transmitter-unit 18.m and at least one antenna 20.m which is connected to said transmit-unit 18.m. Each of the second groups 16.m is connected with a coding/decoding-unit 22.m, m=1,2,...,M.

In the configuration of figure 1 the second groups can belong to mobile communication stations. An example of this is the situation wherein notebooks are provided with at least one second group. In this situation the notebooks can communicate via the second groups to the base-station. The base-station can be an internet and/or an intranet server. In general the number M of second groups will vary during the operation of the base-station.

The second groups 16.m (m=1,2,...,M) can simultaneously transmit radiofrequency signals on essentially the same radiofrequency or radiofrequency-band to the first groups 6.i. The radiofrequency signal which is transmitted from the second group 16.m travels from this second group along travel-paths T_{im} (i=1,2,...,N) to the respective first groups 6.i (i=1,2,...,M). The travel-path T_{im} is the travel-

path from the second group 16.m to the first group 6.i. For each travel-path $T_{i,m}$ a transfer-function can be defined which is expressed with a complex number $h_{i,m}$. The amplitude of the $h_{i,m}$ is the attenuation of the signal's strength and the phase of $h_{i,m}$ is the phase modulation incurred during transmission
 5 along the travel-path. The processing-unit 4 comprises memory means provided with information about the transfer-functions of radiofrequency signals along said travel-paths. Furthermore the processing-unit 4 comprises processing means
 10 for processing receive-signals generated by each of the first groups.

In figure 1 a radiofrequency transmission signal x_m^{RF} is generated by the second group 16.m and transmitted to the first groups 6.i ($i=1, \dots, N$). The generation of this
 15 radiofrequency transmission signal is as follows. The input to the coding/decoding-unit 22.m is a so-called Quadrature Amplitude Modulated symbol (short: QAM-symbol). This QAM-symbol is expressed as a complex number (an example of such a complex number is: $1+2j$, where the real part of the QAM-symbol is 1 and the complex part is 2). Said QAM-symbol is modulated by the coding/decoding-unit 22.m on a low-frequency signal, which yields x_m . This data-signal x_m is the input of the transmit-unit 18.m, which transmit-unit modulates x_m on a radiofrequency signal yielding the radiofrequency signal x_m^{RF} .
 25 The radiofrequency signal x_m^{RF} is transmitted by the antenna 20.m to the first groups.

Each first group 6.i, $i=1, \dots, N$ receives a radiofrequency signal r_i^{RF} in the antenna 12.i, this signal r_i^{RF} is a result of the interference of all transmitted
 30 signals x_m^{RF} , $m=1, \dots, M$. The signal r_i^{RF} is demodulated by the receiver-unit 10.i to a low-frequency receive-signal r_i which contains the modulated information of data-signal x_m . The N receive-signals r_i , $i=1, \dots, N$ are fed to the input of the signal processing-unit 4. The signal processing unit 4
 35 calculates M output signals $x_{i,DET}$, $i=1, \dots, M$. Each output signal $x_{i,DET}$ is an estimation for the data-signal x_i . The

detection signal $x_{i,DET}$ is imputed to the coding/decoding-unit 14.i, $i=1, \dots, N$, which unit generates the QAM-symbol $c_{i,DET}$. This QAM-symbol is an estimation for the QAM-symbol c_i .

The operation of the signal processing unit 4 will now be elucidated on the basis of a mathematical framework. The relation between the data-signals x_m , $m=1, \dots, M$ and the receive-signals r_i , $i=1, \dots, N$ is given with the following vector equation:

$$\mathbf{r} = \mathbf{H} \mathbf{x} + \mathbf{n}, \quad (\text{XIII})$$

where \mathbf{r} is a N -dimensional complex vector $[r_1, \dots, r_1, \dots, r_N]^T$, where \mathbf{H} is a complex $[N \times M]$ -matrix containing the transfer-functions h_{im} , ($i=1, \dots, N$; $m=1, \dots, M$) and wherein \mathbf{x} is a M -dimensional complex vector $[x_1, \dots, x_m, \dots, x_M]^T$. The noise vector \mathbf{n} is a N -dimensional complex vector $[n_1, \dots, n_1, \dots, n_N]^T$, with n_i being the noise term picked up during reception of the signal r_i^{RF} . The signal processing unit 4 calculates detection signals $\mathbf{x}_{DET} = [x_{1,DET}, \dots, x_{M,DET}]^T$ which are estimations for the data-signals \mathbf{x} . These calculations are performed according to the Maximum Likelihood method. It has to be noted here that the detection signals are sometimes called Maximum Likelihood signals. One important aspect of the Maximum Likelihood approach is that use is made of the knowledge that the QAM-symbol c_m , $m=1, \dots, M$ can only take on a limited number of values. This number is called the constellation size C of the second group. So, the data-signal x_m for a particular m can only take on C different values. This implicates that the total number of possible different value combinations of the data-vector \mathbf{x} is C^M . All these C^M different value combinations together constitute the test set \mathbf{X}_{SET} , wherein the p^{th} element of the set is a value combination which is a complex M -dimensional vector \mathbf{x}_{SET}^p . This implicates that the signal processing unit can calculate a detection signal by trying to match all elements of the set and choosing the best fit according to (XIII). In order to save processing time it is also possible only to match the elements of a subset of the

set. For the latter approach several reduced search techniques are developed according to the invention. The detection signals which are found by matching elements of the set are called Maximum Likelihood signals.

5 The signal processing-unit 4 can find the Maximum Likelihood detection signal in particular according to the following algorithm. This algorithm will be described in mathematical terms. The detection signals \mathbf{x}_{DET} are calculated by the signal-processing-unit 4 according to

$$10 \quad \mathbf{x}_{\text{DET}} = \arg_{\text{over set}} \min(||\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p||), \quad (\text{XIV})$$

where $\arg_{\text{over set}} \min(||\dots||)$ is a function which, according to (XIV), yields that vector \mathbf{x}_{DET} out of a set \mathbf{X}_{SET} of P vectors $\mathbf{x}_{\text{SET}}^p$ ($p=1, \dots, P$) for which the length $||\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p||$ of the complex N -dimensional vector $\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p$ is minimal and where

15 $\mathbf{x}_{\text{SET}}^p$ is the p^{th} complex M -dimensional vector $[\mathbf{x}_{\text{SET}, 1}^p, \dots, \mathbf{x}_{\text{SET}, m}^p, \dots, \mathbf{x}_{\text{SET}, M}^p]^T$ of the set \mathbf{X}_{SET} , wherein the vectors $\mathbf{x}_{\text{SET}}^p$ in the set \mathbf{X}_{SET} contain possible combinations of values which can be assigned by the second groups to an information signal \mathbf{x} , where \mathbf{x}_m is one individual

20 communication signal. Since the data-signals \mathbf{x}_m $m=1, \dots, M$ are transmitted simultaneously each detection signal $\mathbf{x}_{m, \text{DET}}$ results in the generation of one of M simultaneous data communication signals.

The principle of the Maximum Likelihood Detection method will now be illustrated with the schematic figure 2. This figure shows QAM-symbols c_m $m=1, \dots, M$ which are the possible inputs to the coding/decoding units 22.m. The QAM-symbol c_1 is marked with a * 26.1 and equals $(-1+j)$. Each diagram 24.m contains a QAM-symbol c_m which can take on 4 different values. These possible values are marked with 0 28.m. The actual possible values for the QAM-symbols are $(1+j)$, $(-1+j)$, $(-1-j)$ and $(1-j)$. Thus here the constellation size C of the second groups is $C=4$. As is explained before the QAM-symbols are the information which is

35 modulated on the corresponding data signal \mathbf{x}_m . However, from a mathematical point of view the QAM-symbols are identical to

the signals x_m . So, the value of the low-frequency signal x_1 in the example of figure 2 is $(-1+j)$ and the value of x_m is $(1-j)$. The transmission and the subsequent reception of the QAM-symbols to the first groups 6.i takes place via

5 radiofrequency carrier signals. The mathematical formulation of this transmission is a transformation of the vector \mathbf{x} with the matrix \mathbf{H} and an addition of noise \mathbf{n} , see equation (XIII). This is illustrated with the transformation block 30 which contains M input-signals x_m $m=1, \dots, M$ and N output-signals r_i

10 $i=1, \dots, N$. The values of the output signals r_i $i=1, \dots, N$ are represented with * marks 34.i in the diagrams 32.i. Each diagram 32.i contains one received component r_i of \mathbf{r} . As a consequence of the time-varying nature of \mathbf{H} and as a consequence of noise the values of r_i will generally vary,

15 even if the QAM-symbols c_m would have continuously constant values. Now the signal processing unit 4 calculates the transformation of all possible number of value combinations in the test set (or a subset of the test set) of the QAM-symbols, in order to try these elements in (XIV), according

20 to:

$$\mathbf{r}_{SP}^p = \mathbf{H} \mathbf{x}_{SET}^p, \quad p=1, \dots, P. \quad (\text{XV})$$

The complete test set comprises $P=C^M$ combinations (but for a subset of the test set $P \leq C^M$). Equation (XV) yields possible receive-signals in the situation of absence of noise. These

25 signals are indicated with 0 marks 36.i in the diagrams 32.i. Finally, the Maximum Likelihood solution is that value combination \mathbf{x}_{SET}^p in the test set, which corresponds to the 0 marks of its components, for which the value

$$||\mathbf{r} - \mathbf{r}_{SP}^p||, \quad (\text{XVI})$$

30 is minimal. In the case in which the vectors \mathbf{r} and \mathbf{r}_{SP}^p only comprise one component the Maximum Likelihood solution is found with the 0 in diagram 32.1 which is closest to the *.

Figure 3 gives a more detailed example of a wireless data communication system according to the invention where

35 the number of first groups $N=3$, the number of second groups $M=2$ and the constellation size $C=2$. In total there are 4

possible value combinations which can be assigned to the data-signals \mathbf{x} . In this example the data-signal is $\mathbf{x} = [(0+j), (0+j)]^T$. Since the number of first groups is greater than the number of second groups a robust communication system, fairly insensitive to noise, is realised. The possible values for the components of the data-signals \mathbf{x} are schematically indicated with 0 marks 26.1 in the diagrams 24.1 and 24.2 in figure 3. The test set comprises all these possible value combinations ($P=4$), so the test set \mathbf{X}_{SET} is given with:

$$\begin{aligned} \mathbf{X}_{\text{SET}} &= \{\mathbf{x}_{\text{SET}}^1; \mathbf{x}_{\text{SET}}^2; \mathbf{x}_{\text{SET}}^3; \mathbf{x}_{\text{SET}}^4\}, \\ \text{where:} \\ \mathbf{x}_{\text{SET}}^1 &= [(0+j), (0+j)]^T, \\ \mathbf{x}_{\text{SET}}^2 &= [(0-j), (0+j)]^T, \\ \mathbf{x}_{\text{SET}}^3 &= [(0+j), (0-j)]^T, \\ \mathbf{x}_{\text{SET}}^4 &= [(0-j), (0-j)]^T, \end{aligned} \quad (\text{XVII})$$

wherein the notation $\mathbf{X}_{\text{SET}} = \{...\}$ means that \mathbf{X}_{SET} is the set of all vectors which are enumerated between the brackets $\{.\}$. In this case the matrix \mathbf{H} containing the transfer-functions is a complex $[3 \times 2]$ -matrix. The transformation of the elements of the test set \mathbf{X}_{SET} (see (XVII)) according to (XV) results in 4 vectors \mathbf{r}_{sp}^p , each of which has 3 components. The values of the respective components of the vectors \mathbf{r}_{sp}^p are depicted in the respective diagrams 32.1, 32.2 and 32.2 of figure 3 and marked with 0 marks 36.i, $i=1,2,3$. The transformation of the data-signal \mathbf{x} according to (XIII) yields the receive signal \mathbf{r} . The respective components of this signal are indicated with * marks 34.i in the respective diagrams 32.1, 32.2 and 32.2 of figure 3. Note that despite the relation $\mathbf{x} = \mathbf{x}_{\text{SET}}^1$ the signal \mathbf{r} is unequal to \mathbf{r}_{sp}^1 as a consequence of the noise \mathbf{n} . The Maximum Likelihood solution is found according to (XIV). Note that 2 simultaneous data communication channels are generated, which channels are the components of the vector \mathbf{x} (the first channel is x_1 and the second channel is x_2).

Figure 4 gives an example of a wireless data communication system in which there are more second groups ($M=2$) than first groups ($N=1$). However, with the detection

algorithm according to the invention the signal processing-unit sometimes can recover the transmitted M-dimensional data-signal \mathbf{x} . In this case the data-signal $\mathbf{x} = [(0+j), (0+j)]^T$. The constellation size $C=2$. So, there are 4 possible value combinations which can be assigned to the data-signals \mathbf{x} . The possible values for the components of these data-signals are indicated with 0 marks 26.1 in the diagrams 24.1 and 24.2 of figure 4. The test set comprises all these possible value combinations ($P=4$), so the test set \mathbf{x}_{SET} is given with (XVII). In this example the matrix \mathbf{H} containing the transfer-functions is a complex $[1*2]$ -matrix:

$$\mathbf{H} = [h_{11} \quad h_{12}] = [\mathbf{h}_1 \quad \mathbf{h}_2], \quad (\text{XVIII})$$

where the column \mathbf{h}_1 is identical to the scalar h_{11} and the column \mathbf{h}_2 is identical to the scalar h_{12} . The transformation of the elements of the test set \mathbf{x}_{SET} (see (XVII)) according to (XV) results in 4 scalars r_{sp}^p . The values of these 4 scalars r_{sp}^p are depicted in the diagrams 32.1 of figure 4 and marked with 0 marks 36.1. The transformation of the data-signal \mathbf{x} according to (XIII) yields the receive signal r . In this example this signal is also a scalar which is indicated with a * mark 34.1 in the diagrams 32.1 of figure 4. Note that despite the relation $\mathbf{x} = \mathbf{x}_{\text{SET}}^1$ the signal r is unequal to r_{sp}^1 as a consequence of the noise \mathbf{n} . The Maximum Likelihood solution is found according to (XIV) and is given with the 0 mark which is closest to the * mark 34.1.

The calculations of the signal processing unit based on the equation (XIV) can be approximated with the following expression in order to save processing time:

$$||\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p|| = \sum_{i=1, \dots, N} (||\text{Real}([\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i)|| + ||\text{Im}([\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i)||), \quad (\text{XIX})$$

wherein $\sum_{i=1, \dots, N} (\dots)$ is a summation over the index i from 1 to N over the argument $(||\text{Real}([\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i)|| + ||\text{Im}([\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i)||)$, where $||(\dots)||$ yields the absolute value of its input argument and where $\text{Real}(\dots)$ is a function

which, in equation (XIX), yields the real part of its complex argument $[\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i$, with $[\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i$ being the i^{th} component of the complex N-dimensional vector $\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p$, and where $\text{Im}(\dots)$ is a function which, in equation (XIX), yields the imaginary part of its complex argument $[\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i$.

The signal processing-unit 4 finds the Maximum Likelihood detection signal according to (XIV). With this equation the detection signal is found by trying to fit elements of the test set \mathbf{X}_{SET} . Since the test set comprises C^M elements this can easily lead to a huge amount of processing time. To reduce the processing time the invention provides in an algorithm which can limit the search to a subset of \mathbf{X}_{SET} . A first algorithm which provides in an intelligent way of choosing a pre-determined subset of \mathbf{X}_{SET} is given below and is called a Reduced Search Technique. In this Reduced Search technique a search-tree is passed through according to the following steps 1 to 7:

- **Step 1:** calculate the lengths of the complex vectors \mathbf{v} corresponding to all combinations of possible values which can be assigned to $[x_1, \dots, x_L]$. The vector \mathbf{v} is given with

$$\mathbf{v} = (\mathbf{r} - \sum_{i=1, \dots, L} \mathbf{h}_i * \mathbf{x}_{\text{SET}, i}^p), \quad (\text{XX})$$

where $\sum_{i=1, \dots, L} (\dots)$ is a summation over the index i from 1 to L over the complex argument $[\mathbf{h}_i * \mathbf{x}_{\text{SET}, i}^p]$ and where \mathbf{h}_i is the i^{th} column $[\mathbf{h}_{1,i}, \dots, \mathbf{h}_{N,i}]^T$ of the matrix \mathbf{H} ;

- **Step 2:** Select the K combinations of values for $[\mathbf{x}_{\text{SET}, 1}^p, \dots, \mathbf{x}_{\text{SET}, L}^p]$ corresponding to the K smallest lengths of \mathbf{v} as well as the K vectors \mathbf{v} itself and set $m = L+1$;
- **Step 3:** Calculate the lengths of the $C*K$ new vectors \mathbf{v} given by

$$\mathbf{v} = \mathbf{v}_{\text{old}} - \mathbf{h}_m * \mathbf{x}_{\text{SET}, m}^p, \quad (\text{XXI})$$

where \mathbf{v}_{old} is one of the K vectors \mathbf{v} resulting from the preceding step and where \mathbf{h}_m is the m^{th} column of \mathbf{H} ;

- **Step 4:** Select those K combinations of values for $[\mathbf{x}_{\text{SET}, 1}^p, \dots, \mathbf{x}_{\text{SET}, m}^p]$ that correspond to the K smallest lengths of \mathbf{v} as well as the K vectors \mathbf{v} itself and set $m = m_{\text{old}} + 1$, where m_{old} is m from the preceding step;

- Step 5: If $m < M$ then go to Step 3, else go to step 6;
- Step 6: Calculate the lengths of the $C \cdot K$ new vectors v given by

$$v = v_{old} - h_m * x_{SET, m}^p \quad (XXII)$$

- 5 • Step 7: the detection signal x_{DET} is determined as that combination of values $x_{DET} = [x_{SET, 1}^p, \dots, x_{SET, M}^p]$ which corresponds to the vector v with the smallest length, wherein K and L are predetermined fixed integer parameters which control the size P of the set x_{SET} and where v_{old} is one
- 10 of the K vectors v resulting from Step 3, the calculated detection signal x_{DET} is that element of the set x_{SET} for which the vector v is smallest. The principle of this reduced search technique is schematically illustrated in diagram 38 of figure 5 (according to the example of figure 4). In this
- 15 example the pre-determined parameter $L=1$ and $K=4$. Furthermore, the constellation size $C=2$, the number of second groups $M=2$, the number of first groups $N=1$, the matrix H is given with (XVIII) and the test set is defined with (XVII). The received vector r is a scalar r . The first stage 40 of
- 20 the algorithm is to evaluate (XX). This results in principle in four lengths $v1$, $v2$, $v3$ and $v4$ corresponding to four vectors v (note that in this example v and h_1 and h_2 are all scalars):

$$\begin{aligned} 25 \quad v1 &= ||r - h_1 * x_{SET, 1}^1|| = ||r - h_1 * j|| \\ v2 &= ||r - h_1 * x_{SET, 1}^2|| = ||r - h_1 * (-j)|| \\ v3 &= ||r - h_1 * x_{SET, 1}^3|| = ||r - h_1 * j|| = v1 \quad (XXIII) \\ v4 &= ||r - h_1 * x_{SET, 1}^4|| = ||r - h_1 * (-j)|| = v2. \end{aligned}$$

- 30 These values $v1$ and $v2$ are shown in figure 5 in Step 1 of the algorithm 42. According to Step 2 both values $v1$ and $v2$ are selected. Hereafter, in Step 3 and Step 4 the lengths of 4 new vectors v are calculated. These 4 new lengths are:

$$\begin{aligned} 35 \quad v1 &= ||r - h_1 * j - h_2 * j|| \\ v2 &= ||r - h_1 * (-j) - h_2 * j|| \\ v3 &= ||r - h_1 * j - h_2 * (-j)|| \quad (XXIV) \end{aligned}$$

$$v_4 = ||r - h_1 * (-j) - h_2 * (-j)||.$$

These four lengths 44 are depicted in figure 5. From Step 5 of the algorithm a jump is made to Step 6. Finally, in Step 6 the calculation of the Maximum Likelihood detection signal is finished. In this case the detection signal equals the test vector x_{SET}^4 : $x_{DET} = x_{SET}^4$. In the algorithm stated above the processing load of the signal processing-unit 4 is known on beforehand and can be controlled with the parameters K and L.

It is important to note that the detection signal comprises two components whereas the receive-signal r only comprises one component. So, in principle two separate simultaneous communication channels are formed. This example shows an important aspect of the nature of the detection algorithm according to the invention, namely that the number of receivers may be less than the number of transmitters, and thus the number of receivers may also be less than the number of simultaneous communication channels.

In another embodiment of the wireless data communication system the signal processing-unit 4 also finds the Maximum Likelihood detection signal according to (XIV). However, in this embodiment the processing load of the signal processing-unit 4 is not known on beforehand. The subset of the test set is x_{SET} is controlled with a real value threshold parameter T. The algorithm of this Reduced Search Technique is given below and comprises seven steps:

- **Step 1:** Calculate the values of the lengths of the C vectors v according to the C possible values $x_{SET, 1}^p$

$$v = (r - h_1 * x_{SET, 1}^p). \quad (XXV)$$
 - **Step 2:** Select those combinations of values for $x_{SET, 1}^p$ for which the lengths of v are smaller than T, as well as the corresponding vectors v and set $m=2$;
 - **Step 3:** Calculate the lengths of the new vectors v given by

$$v = v_{old} - h_m * x_{SET, m}^p \quad (XXVI)$$
- wherein v_{old} is one of the vectors v resulting from the preceding step and adjust the threshold T;

- **Step 4:** Select those combinations of values for $[x_{SET, 1}^p, \dots, x_{SET, m}^p]$ for which v is smaller than T , discard the other combinations and set $m = m_{old} + 1$, where m_{old} is m from the preceding step;
 - 5 • **Step 5:** If $m < M$ then go to Step 3, else go to step 6,
 - **Step 6:** Calculate the lengths of the new vectors v given by

$$v = v_{old} - h_m * x_{SET, m}^p \quad (XXVII)$$
 - **Step 7:** the detection signal x_{DET} is determined as that combination of values $x_{DET} = [x_{SET, 1}^p, \dots, x_{SET, m}^p]$ which
 - 10 corresponds to the vector v with the smallest length, wherein v_{old} is one of the vectors v resulting from step 3.
- The principle of this algorithm can also be illustrated with figure 5. The relevant parameters in the example of figure 5 are $M=2$, $N=1$, $C=2$. After the first Step the 4 vectors v
- 15 result, the lengths of these vector are given with (XXIII). Also a pre-determined threshold value T_1 46 which is applied in Step 2 is presented in the figure 5. As a result of the threshold T_1 46 the branch $||r - h_1 * j||$ (corresponding to v_1 and v_3 in (XXIII)) is discarded in the subsequent Steps.
- 20 This means that only the lengths of the vectors v_2 and v_4 are calculated in Step 3 of the algorithm. Hereafter the threshold T_1 46 is adjusted to the new threshold value T_2 48 for the next Step 4. Next, the Steps 4 and 5 are performed, which includes the selection of the smallest vectors v , after
- 25 which the algorithm jumps to Step 6. Step 6 selects the Maximum Likelihood detection signal between the two left test signals x_{SET}^2 and x_{SET}^4 . The Maximum Likelihood solution appears to be $x_{DET} = x_{SET}^4$.

The embodiments of the wireless data communication

30 system comprising the Reduced Search Techniques as described hereinbefore can also be applied with a modification for providing a further reduction in processing time. According to this modification a factor C less test vectors in the test set have to be checked out in equation (I). In said

35 modification the signal processing-unit is arranged to find,

in use, the detection signal x_{DET} according to a Reduced Search Technique which also comprises the following steps:

- **Step A1:** calculate an inner product z of the vector r with the u^{th} column h_u of the matrix H , where u is an integer

5 $1 \leq u \leq M$, according to:

$$z = h_u^* r, \quad (XXVIII)$$

where h_u^* is the complex conjugated and transposed of h_u ;

- **Step A2:** calculate C^{M-1} terms Interf corresponding to all possible value combinations which can be assigned to
- 10 $[x_1, \dots, x_{u-1}, x_{u+1}, \dots, x_M]$, wherein the terms Interf are defined according to:

$$\text{Interf} = \sum_{(i=1, \dots, M \wedge i \neq u)} x_i * (h_u^* * h_i), \quad (XXIX)$$

wherein $\sum_{(i=1, \dots, M \wedge i \neq u)}$ is a summation over the index i from 1 to M with the exception of the integer u ;

- 15 • **Step A3:** estimate, on the basis of the equations (XXVIII), (XXIX) and z' according to:

$$z' = \text{Interf} + x_u * (h_u^* * h_u), \quad (XXX)$$

where z' is an approximation of z , the value for x_u corresponding to each of the value combinations

- 20 $[x_1, \dots, x_{u-1}, x_{u+1}, \dots, x_M]$, and constitute a test set X_{SET} comprising C^{M-1} vectors x_{SET}^p , wherein each vector x_{SET}^p represents a value combination

$[x_1, \dots, x_{u-1}, x_u, x_{u+1}, \dots, x_M]$;

- **Step A4:** determine the detection signal x_{DET} according to
- 25 equation (A), wherein the test set is defined with the C^{M-1} vectors x_{SET}^p from the preceding step.

The approximation (XXX) is based on the assumption that the noise n can be neglected.

In accordance with the provisions of the patent

30 statutes, the present invention has been described in what is considered to represent its preferred embodiments. However, it should be noted that the invention can be practised otherwise than as specifically illustrated and described without departing from its spirit or scope. For example, the

35 wireless data communication system according to the invention can be used not only for simplex communication (from the

second groups to the first groups) but also for duplex data communication (from the second groups to the first groups and vice versa). In the latter case the communication from the first groups to the second groups may or may not be arranged
5 in such a way as to obtain a multiple of simultaneous data communication channels.

Claims

1. Wireless radiofrequency data communication system comprising:

- a base-station comprising a multiple of N first groups and a signal processing-unit comprising memory means and processing means, wherein each first group comprises a receiver-unit provided with a receiver and at least one antenna which is connected to the receiver-unit, wherein the signal processing-unit is connected with each of the first groups for processing receive-signals generated by each of the first groups, and
 - a multiple of M second groups for transmitting radiofrequency signals to the first groups, wherein each second group comprises a transmitter-unit provided with a transmitter and at least one antenna which is connected to the transmitter-unit,
- wherein the memory means of the signal processing-unit are provided with means comprising information about the transfer-functions of radiofrequency signals from each of the antennas of the second groups to each of the antennas of the first groups, and wherein the transmitters and receivers operate on essentially the same radiofrequency or radiofrequency-band,

characterised in that,
the signal processing-unit is arranged to process, in use, the receive-signals on the basis of the Maximum Likelihood Detection method, such that for each second group of the second groups an individual communication channel is formed with the base-station wherein these communication channels are generated simultaneously and separately from each other.

2. Wireless radiofrequency data communication system according to claim 1,

characterised in that,

each transmitter comprises means for modulating an information signal on a radiofrequency signal according to the Quadrature Amplitude Modulation (QAM) method, wherein so-called QAM-symbols are transmitted, and that each receiver
 5 comprises means for demodulating information signals from a received radiofrequency signal.

3. Wireless radiofrequency data communication system according to one of the preceding claims, characterised in that,

10 the signal processing-unit is arranged to calculate, in use, a detection signal \mathbf{x}_{DET} according to

$$\mathbf{x}_{\text{DET}} = \arg_{\text{over set}} \min(||\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p||), \quad (\text{A})$$

where $\arg_{\text{over set}} \min(||\dots||)$ is a function which, according to (A), yields that vector \mathbf{x}_{DET} out of a set \mathbf{X}_{SET} of P vectors $\mathbf{x}_{\text{SET}}^p$
 15 ($p=1, \dots, P$) for which the length $||\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p||$ of the complex N -dimensional vector $\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p$ is minimal, wherein \mathbf{r} is a complex N -dimensional vector $[r_1, \dots, r_1, \dots, r_N]^T$ with r_i being the signal received by the i^{th} first group of the N first groups, \mathbf{H} is a complex $[N * M]$ matrix containing transfer-
 20 functions h_{im} ($i=1, \dots, N; m=1, \dots, M$), wherein h_{im} is the transfer-function for transmission from the m^{th} second group of the M second groups to the i^{th} first group of the N first groups, and where $\mathbf{x}_{\text{SET}}^p$ is the p^{th} complex M -dimensional vector $[\mathbf{x}_{\text{SET}, 1}^p, \dots, \mathbf{x}_{\text{SET}, m}^p, \dots, \mathbf{x}_{\text{SET}, M}^p]^T$ of the set \mathbf{X}_{SET} , wherein the
 25 vectors $\mathbf{x}_{\text{SET}}^p$ in the set \mathbf{X}_{SET} contain possible combinations of values which can be assigned by the second groups to an information signal \mathbf{x} , where \mathbf{x} is a M -dimensional vector $[\mathbf{x}_1, \dots, \mathbf{x}_m, \dots, \mathbf{x}_M]^T$ with \mathbf{x}_m being the information signal transmitted by the m^{th} second group of the M second groups to
 30 the first groups and where \mathbf{x}_m is one individual communication signal.

4. Wireless radiofrequency data communication system according to claim 3,

characterised in that,

35 the processing unit is arranged to apply, in use, the following approximation (B) in the calculation of (A)

$$||\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p|| = \sum_{i=1, \dots, N} (||\text{Real}([\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i)|| + ||\text{Im}([\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i)||), \quad (\text{B})$$

5 wherein $\sum_{i=1, \dots, N} (\dots)$ is a summation over the index i from 1 to N over the argument $(||\text{Real}([\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i)|| + ||\text{Im}([\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i)||)$, where $||(\dots)||$ yields the absolute value of its input argument and where $\text{Real}(\dots)$ is a function which, in equation (B), yields the real part of its complex argument $[\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i$, with $[\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i$ being the i^{th} component of the complex N -dimensional vector $\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p$, and where $\text{Im}(\dots)$ is a function which, in equation (B), yields the imaginary part of its complex argument $[\mathbf{r} - \mathbf{H} \mathbf{x}_{\text{SET}}^p]_i$.

5. Wireless radiofrequency data communication system
15 according to claim 3 or 4,
characterised in that,
the set \mathbf{x}_{SET} comprises all possible combinations of values which can be assigned to the signal \mathbf{x} by the second groups.

6. Wireless radiofrequency data communication system
20 according to claim 3 or 4,
characterised in that,
the signal processing-unit is arranged to find, in use, the detection signal \mathbf{x}_{DET} according to a Reduced Search Technique wherein a search-tree is passed through according to the
25 following steps 1 to 7:

- **Step 1:** calculate the lengths of the complex vectors \mathbf{v} corresponding to all combinations of possible values which can be assigned to $[\mathbf{x}_1, \dots, \mathbf{x}_L]$, wherein \mathbf{v} is given by

$$\mathbf{v} = (\mathbf{r} - \sum_{i=1, \dots, L} \mathbf{h}_i * \mathbf{x}_{\text{SET}, i}^p), \quad (\text{C})$$

30 where $\sum_{i=1, \dots, L} (\dots)$ is a summation over the index i from 1 to L over the complex argument $[\mathbf{h}_i * \mathbf{x}_{\text{SET}, i}^p]$ and where \mathbf{h}_i is the i^{th} column $[\mathbf{h}_{1,i}, \dots, \mathbf{h}_{N,i}]^T$ of the matrix \mathbf{H} ;

- **Step 2:** select the K combinations of values for $[\mathbf{x}_{\text{SET}, 1}^p, \dots, \mathbf{x}_{\text{SET}, L}^p]$ corresponding to the K smallest lengths
35 of \mathbf{v} as well as the K vectors \mathbf{v} itself and set $m = L+1$;

- **Step 3:** calculate the lengths of the C*K new vectors \mathbf{v} given by

$$\mathbf{v} = \mathbf{v}_{old} - \mathbf{h}_m * \mathbf{x}_{SET, m}^p, \quad (D)$$

where \mathbf{v}_{old} is one of the K vectors \mathbf{v} resulting from the preceding step and where \mathbf{h}_m is the m^{th} column of \mathbf{H} ;

- **Step 4:** select those K combinations of values for $[\mathbf{x}_{SET, 1}^p, \dots, \mathbf{x}_{SET, m}^p]$ that correspond to the K smallest lengths of \mathbf{v} as well as the K vectors \mathbf{v} itself and set $m = m_{old} + 1$, where m_{old} is m from the preceding step;

- **Step 5:** if $m < M$ then go to Step 3, else go to step 6;
- **Step 6:** calculate the lengths of the C*K new vectors \mathbf{v} given by

$$\mathbf{v} = \mathbf{v}_{old} - \mathbf{h}_M * \mathbf{x}_{SET, M}^p, \quad (E)$$

- **Step 7:** the detection signal \mathbf{x}_{DET} is determined as that combination of values $\mathbf{x}_{DET} = [\mathbf{x}_{SET, 1}^p, \dots, \mathbf{x}_{SET, M}^p]$ which corresponds to the vector \mathbf{v} with the smallest length, wherein K and L are predetermined fixed integer values which control the size P of the set \mathbf{x}_{SET} and wherein the constellation size C of the system is the number of values $\mathbf{x}_{SET, m}^p$ which can be assigned by one of the second groups to one component x_m ($m=1, \dots, M$) of \mathbf{x} and where \mathbf{v}_{old} is one of the K vectors \mathbf{v} resulting from Step 3, the calculated detection signal \mathbf{x}_{DET} is the combination of values \mathbf{x}_{SET}^p corresponding to the smallest vector \mathbf{v} .

- 7. Wireless radiofrequency data communication system according to claim 3 or 4,

characterised in that,

the signal processing-unit is arranged to find, in use, the detection signal \mathbf{x}_{DET} according to a Reduced Search Technique

- wherein a search-tree is passed through according to the following steps 1 to 7:

- **Step 1:** calculate the values of the lengths of the C vectors \mathbf{v} according to the C possible values $\mathbf{x}_{SET, 1}^p$

$$\mathbf{v} = (\mathbf{r} - \mathbf{h}_1 * \mathbf{x}_{SET, 1}^p), \quad (F)$$

- wherein \mathbf{h}_1 is the first column of \mathbf{H} ;

- **Step 2:** select those combinations of values for $x_{SET, 1}^p$ for which the lengths of v are smaller than T , as well as the corresponding vectors v and set $m=2$;
- **Step 3:** calculate the lengths of the new vectors v given by

$$5 \quad v = v_{old} - h_m * x_{SET, m}^p, \quad (G)$$

wherein v_{old} is one of the vectors v resulting from the preceding step and where h_m is the m^{th} column of H ,

and adjust the threshold T ;

- **Step 4:** select those combinations of values for
10 $[x_{SET, 1}^p, \dots, x_{SET, m}^p]$ for which v is smaller than T , discard the other combinations and set $m = m_{old} + 1$, where m_{old} is m from the preceding step;
- **Step 5:** if $m < M$ then go to Step 3, else go to step 6,
- **Step 6:** calculate the lengths of the new vectors v given by

$$15 \quad v = v_{old} - h_m * x_{SET, m}^p, \quad (H)$$

- **Step 7:** the detection signal x_{DET} is determined as that combination of values $x_{DET} = [x_{SET, 1}^p, \dots, x_{SET, m}^p]$ which corresponds to the vector v with the smallest length, wherein T is a predetermined fixed threshold value which
20 controls the size P of the set X_{SET} and wherein the constellation size C of the system is the number of values $x_{SET, m}^p$ which can be assigned by one of the second groups to one component x_m ($m=1, \dots, M$) of x , and wherein v_{old} is one of the vectors v resulting from step 3, the calculated detection
25 signal x_{DET} is the combination of values x_{SET}^p corresponding to the smallest vector v .

8. Wireless radiofrequency data communication system according to one of the claims 3, 4, 6, 7, characterised in that,

- 30 the signal processing-unit is arranged to find, in use, the detection signal x_{DET} according to a Reduced Search Technique which at least comprises the following steps:

- **Step A1:** calculate the inner product z between the vector r and the u^{th} column h_u of the matrix H , where u is an integer

35 $1 \leq u \leq M$, according to:

$$z = h_u^* r, \quad (I)$$

where h_u^* is the complex conjugated and transposed of h_u ;

- **Step A2:** calculate C^{M-1} terms Interf corresponding to all possible value combinations which can be assigned to $[x_1, \dots, x_{u-1}, x_{u+1}, \dots, x_M]$, wherein the terms Interf are defined according to:

$$\text{Interf} = \sum_{(i=1, \dots, M \wedge i \neq u)} x_i * (h_u^* * h_i), \quad (J)$$

wherein $\sum_{(i=1, \dots, M \wedge i \neq u)}$ is a summation over the index i from 1 to M with the exception of the integer u ;

- **Step A3:** estimate, on the basis of the equations (I), (J) and z' according to:

$$z' = \text{Interf} + x_u * (h_u^* * h_u), \quad (K)$$

where z' is an approximation of z , the value for x_u corresponding to each of the value

combinations $[x_1, \dots, x_{u-1}, x_{u+1}, \dots, x_M]$, and constitute a test set X_{SET} comprising C^{M-1} vectors x_{SET}^p , wherein each vector x_{SET}^p represents a value combination

$[x_1, \dots, x_{u-1}, x_u, x_{u+1}, \dots, x_M]$;

- **Step A4:** determine the detection signal X_{DET} according to equation (A), wherein the test set is defined with the C^{M-1} vectors x_{SET}^p from the preceding step.

9. Wireless radiofrequency data communication system according to one of the preceding claims,

characterised in that the number of first groups N exceeds the number of second groups M .

25 10. Wireless radiofrequency data communication system according to one of the claims 1-8,

characterised in that the number of first groups N is less than the number of second groups M .

11. Wireless radiofrequency data communication system according to one of the claims 1-8,

30 characterised in that the number of first groups N is equal to the number of second groups M .

Title: Decoding techniques for multi-antenna systems

Abstract

The invention relates to a wireless radiofrequency data communication system comprising:

- a base-station comprising a multiple of N first groups and a signal processing-unit comprising memory means and processing means, wherein each first group comprises a receiver-unit provided with a receiver and at least one antenna which is connected to the receiver-unit, wherein the signal processing-unit is connected with each of the first groups for processing receive-signals generated by each of the first groups, and
- a multiple of M second groups for transmitting radiofrequency signals to the first groups, wherein each second group comprises a transmitter-unit provided with a transmitter and at least one antenna which is connected to the transmitter-unit,

wherein the memory means of the signal processing-unit is provided with means comprising information about the transfer-functions of radiofrequency signals from each of the antennas of the second groups to each of the antennas of the first groups, and wherein the transmitters and receivers operate on essentially the same radiofrequency or radiofrequency-band.

THIS PAGE BLANK (USPTO)

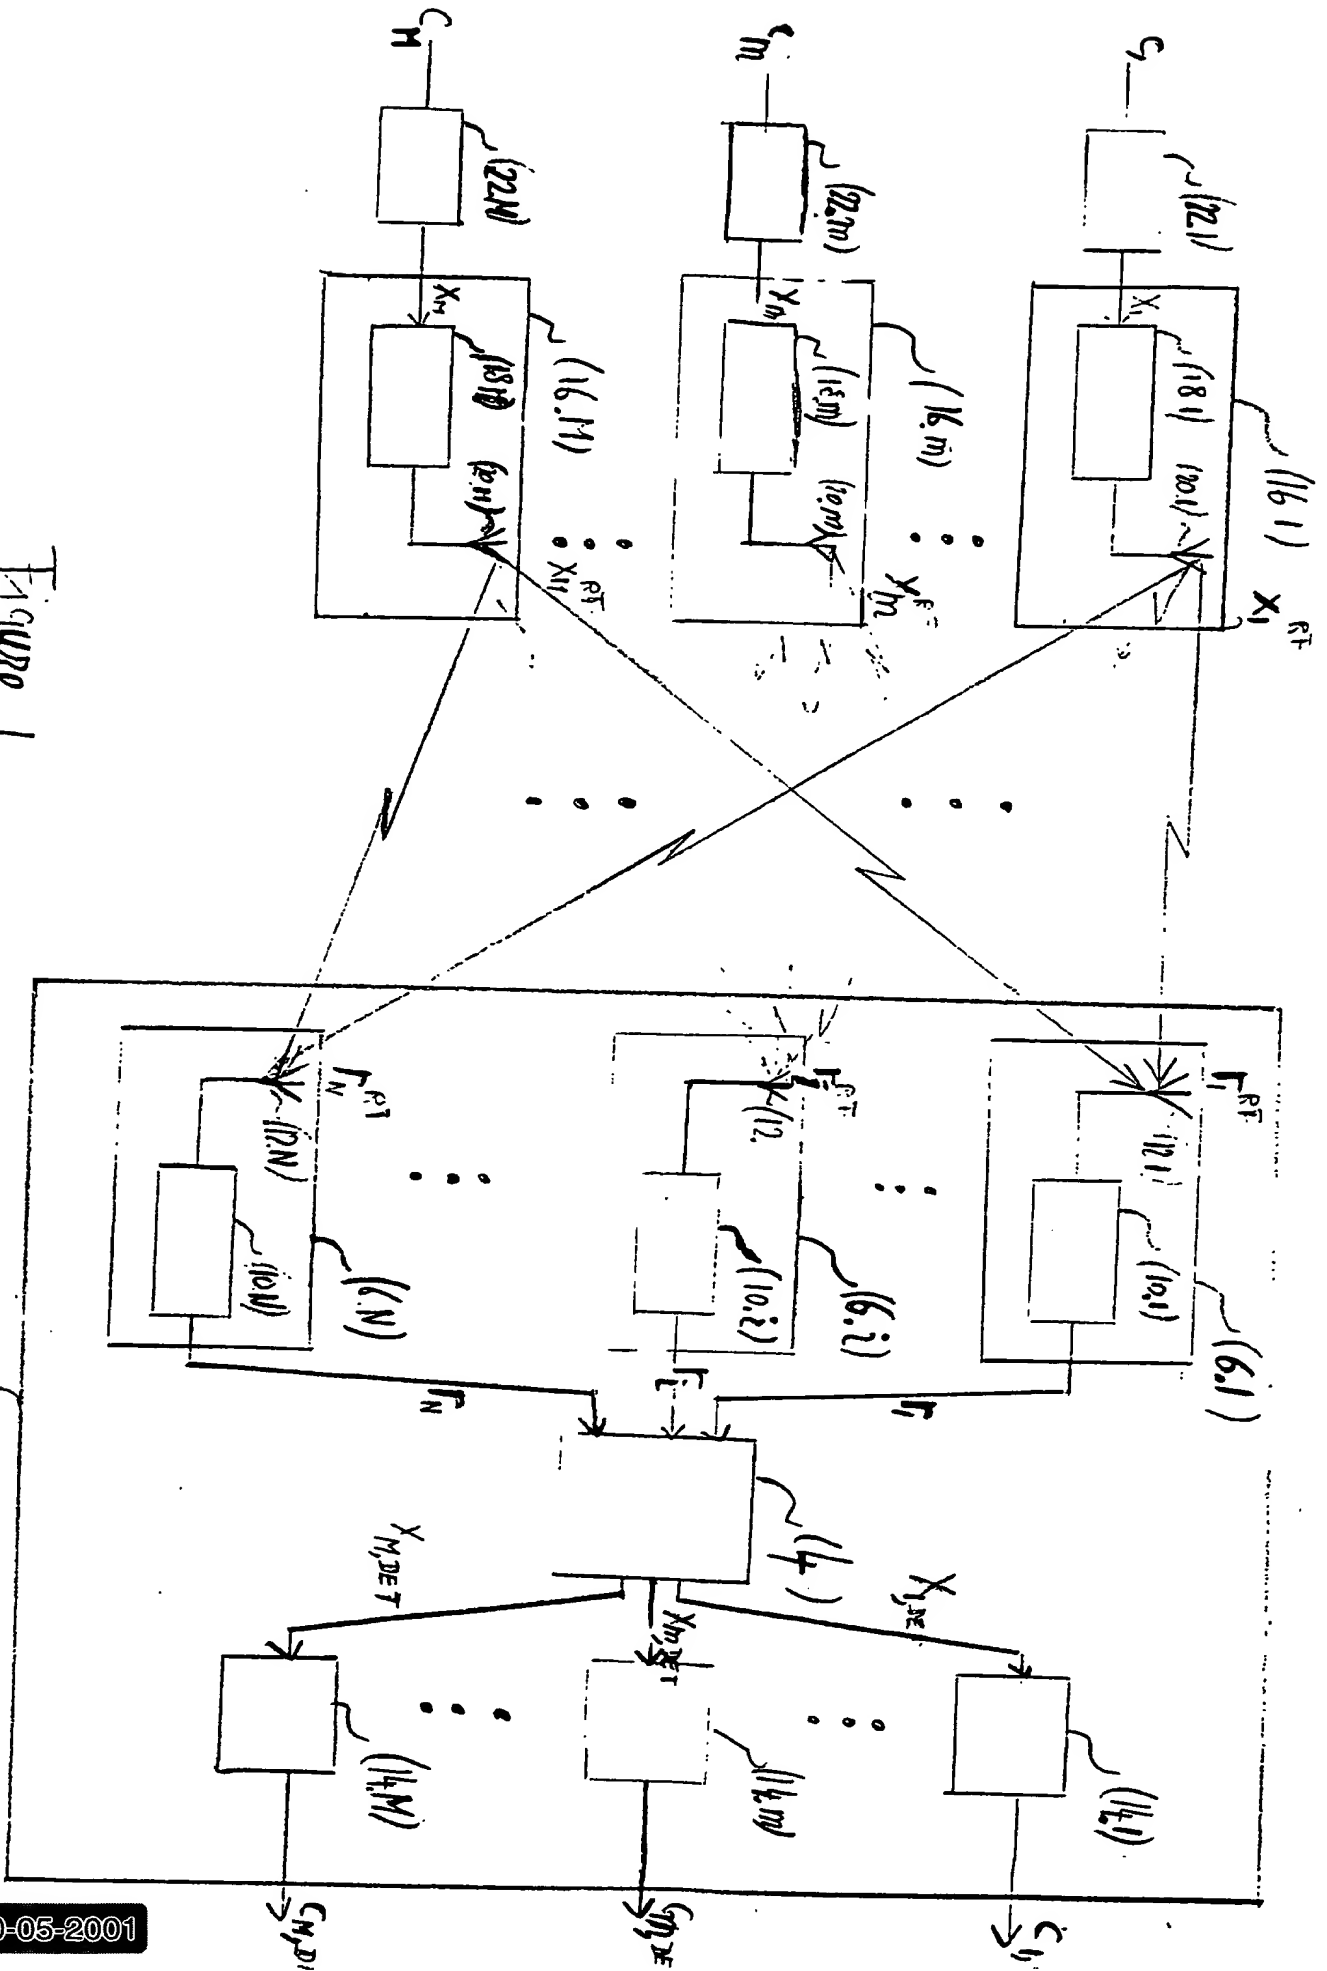


Figure 1.

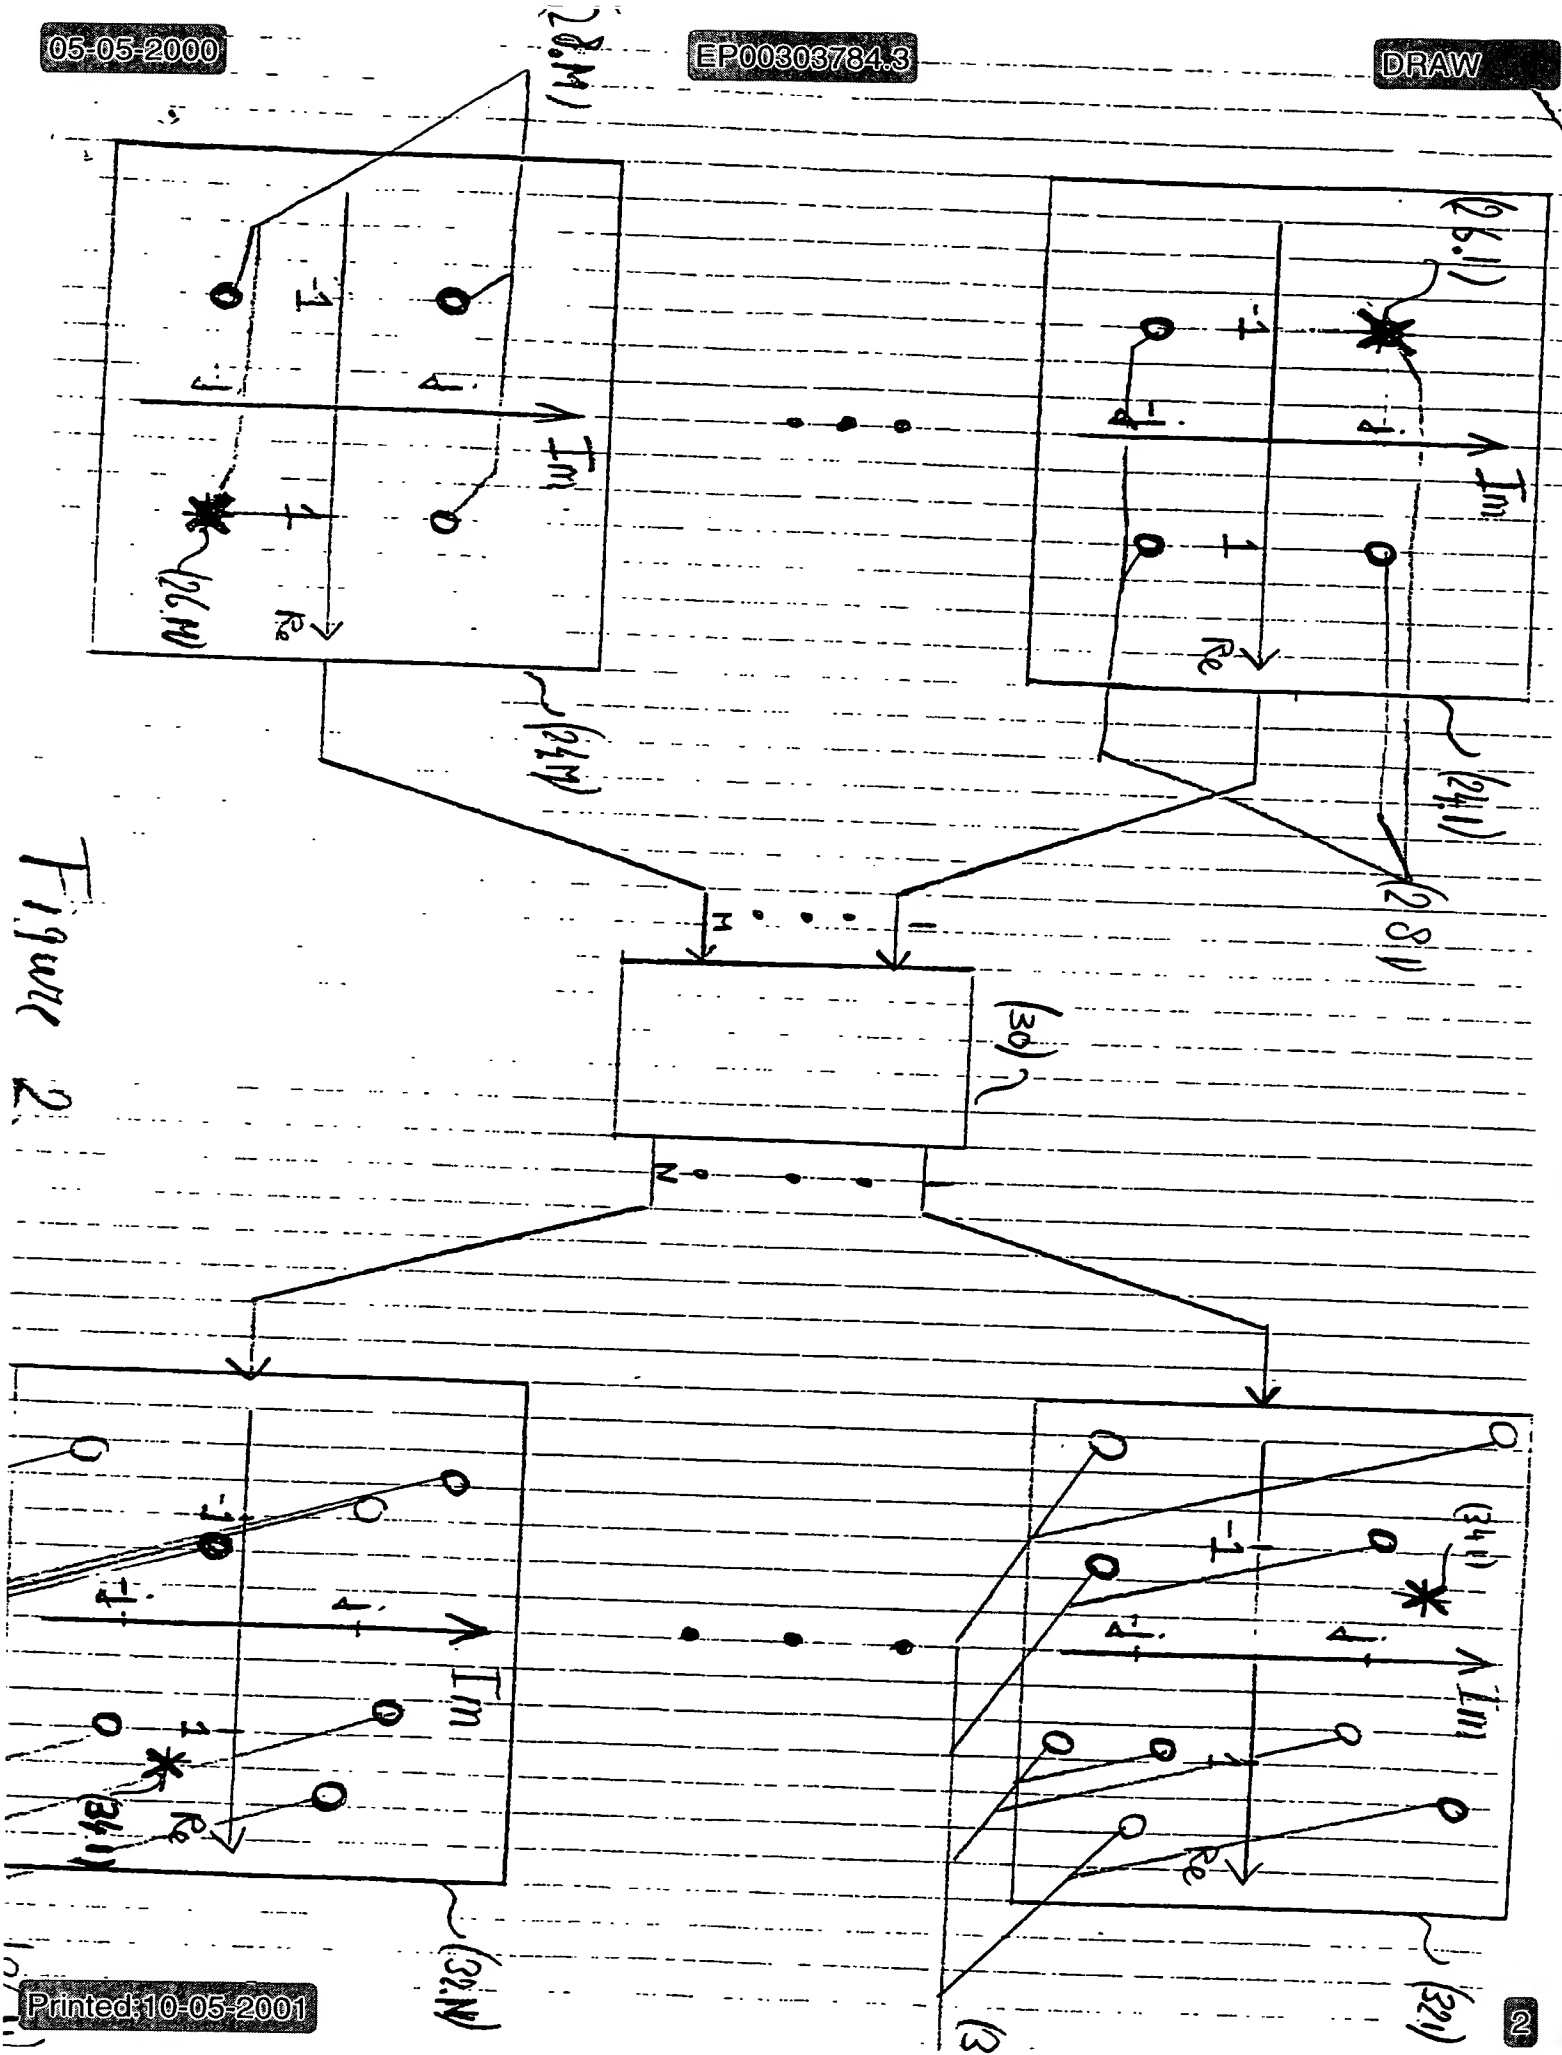


Figure 2

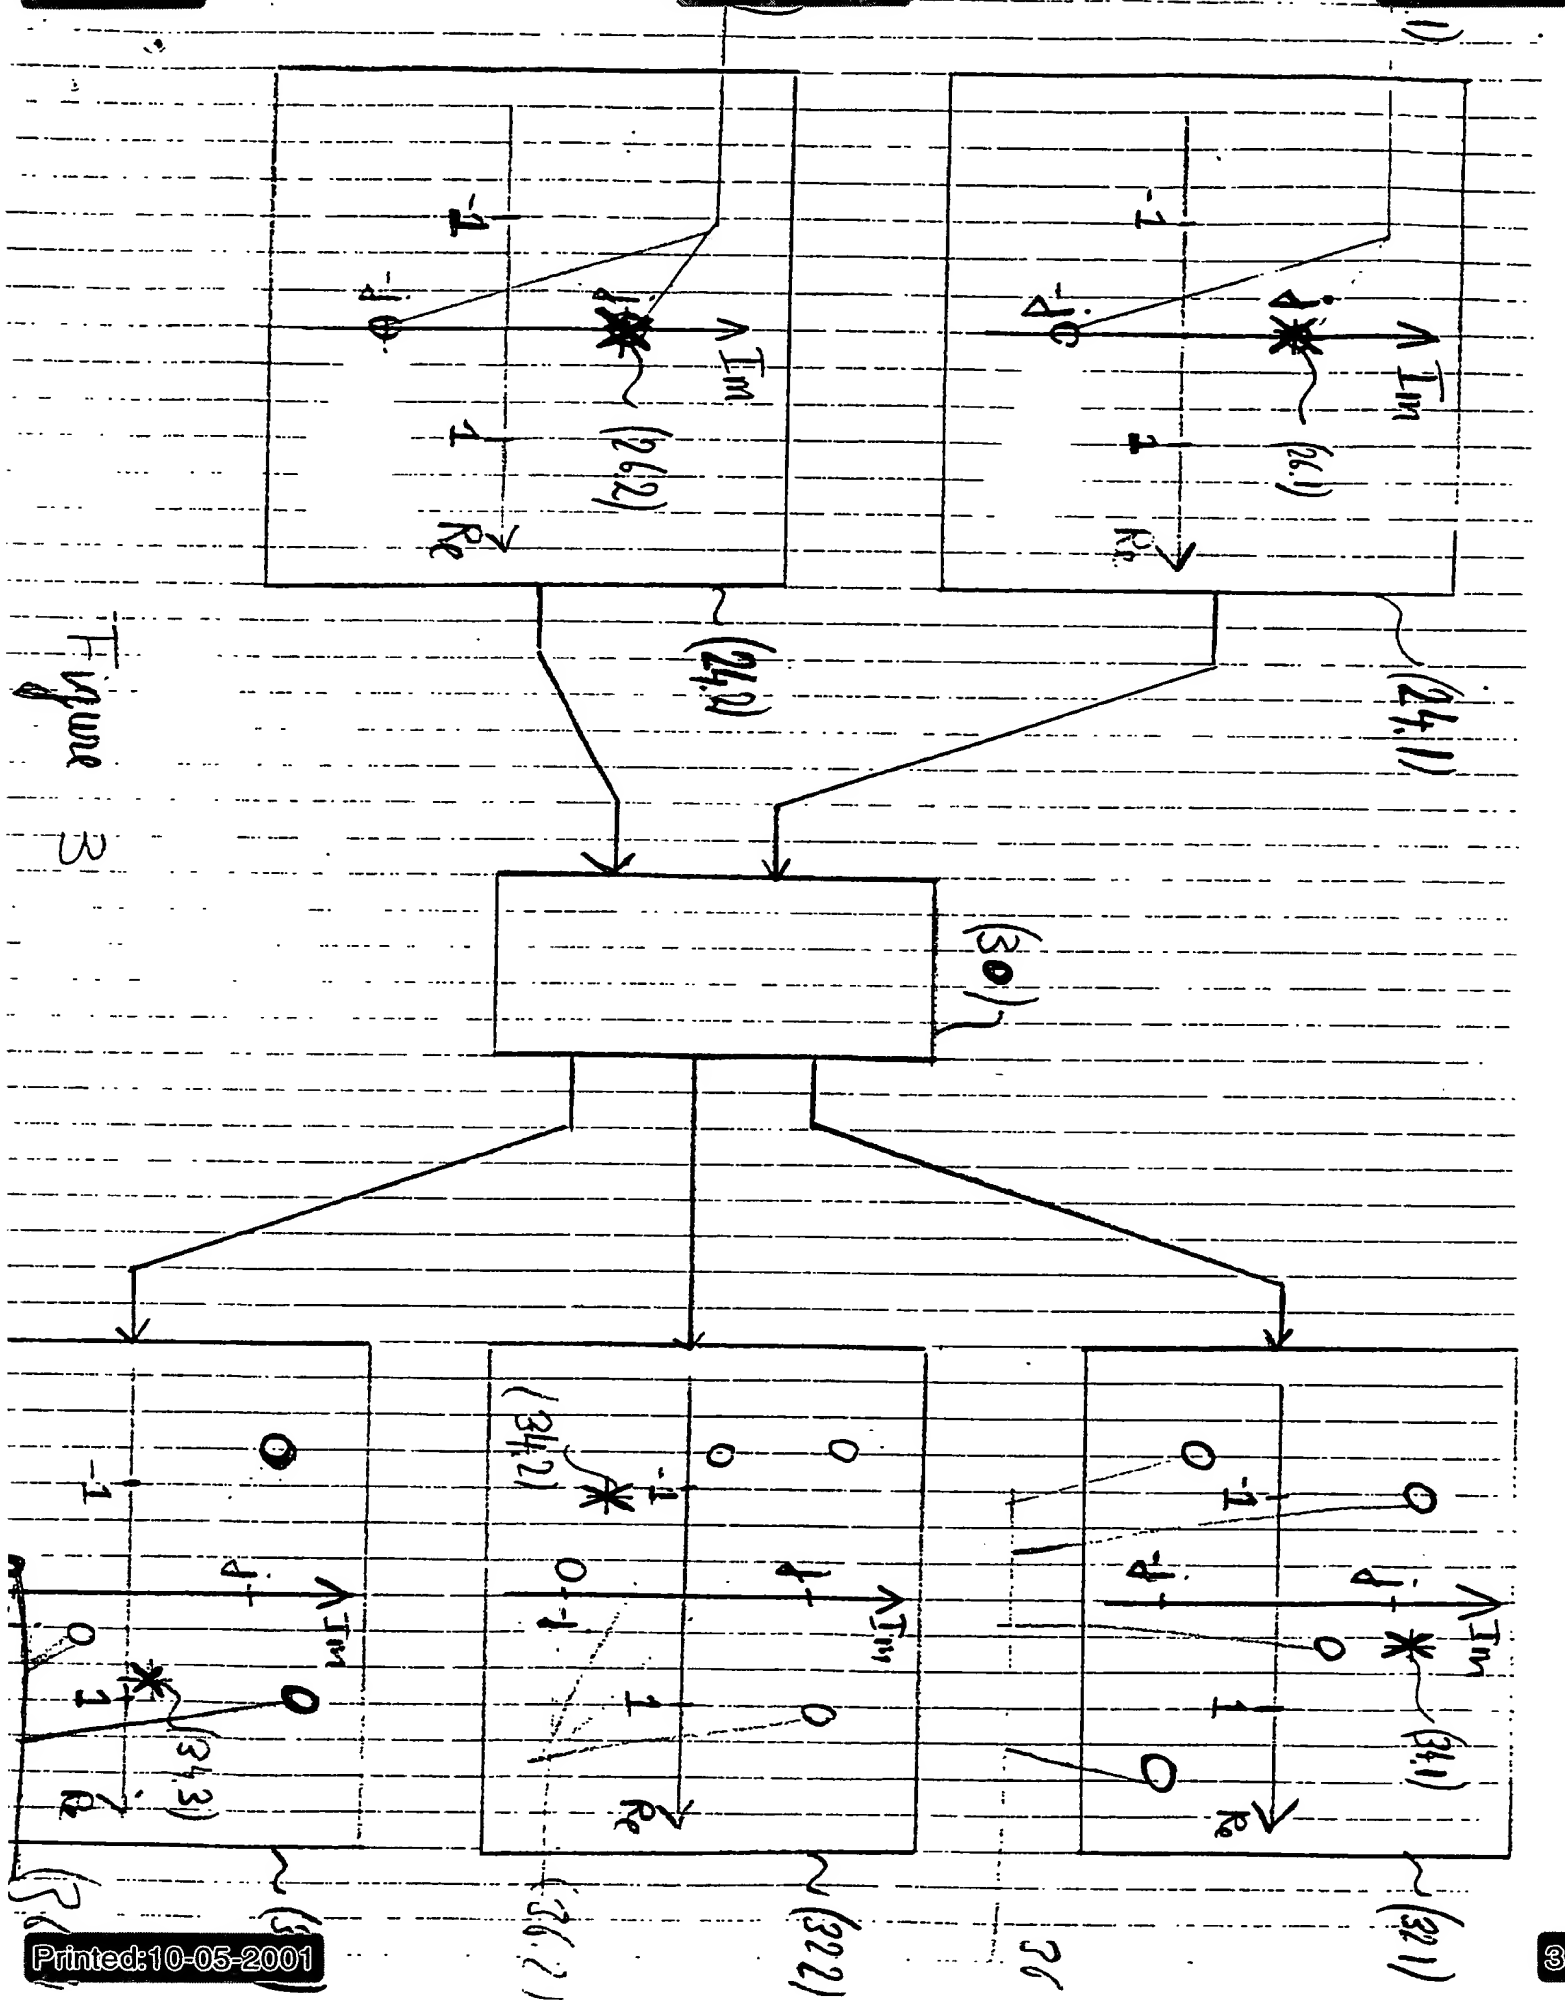


Figure 3


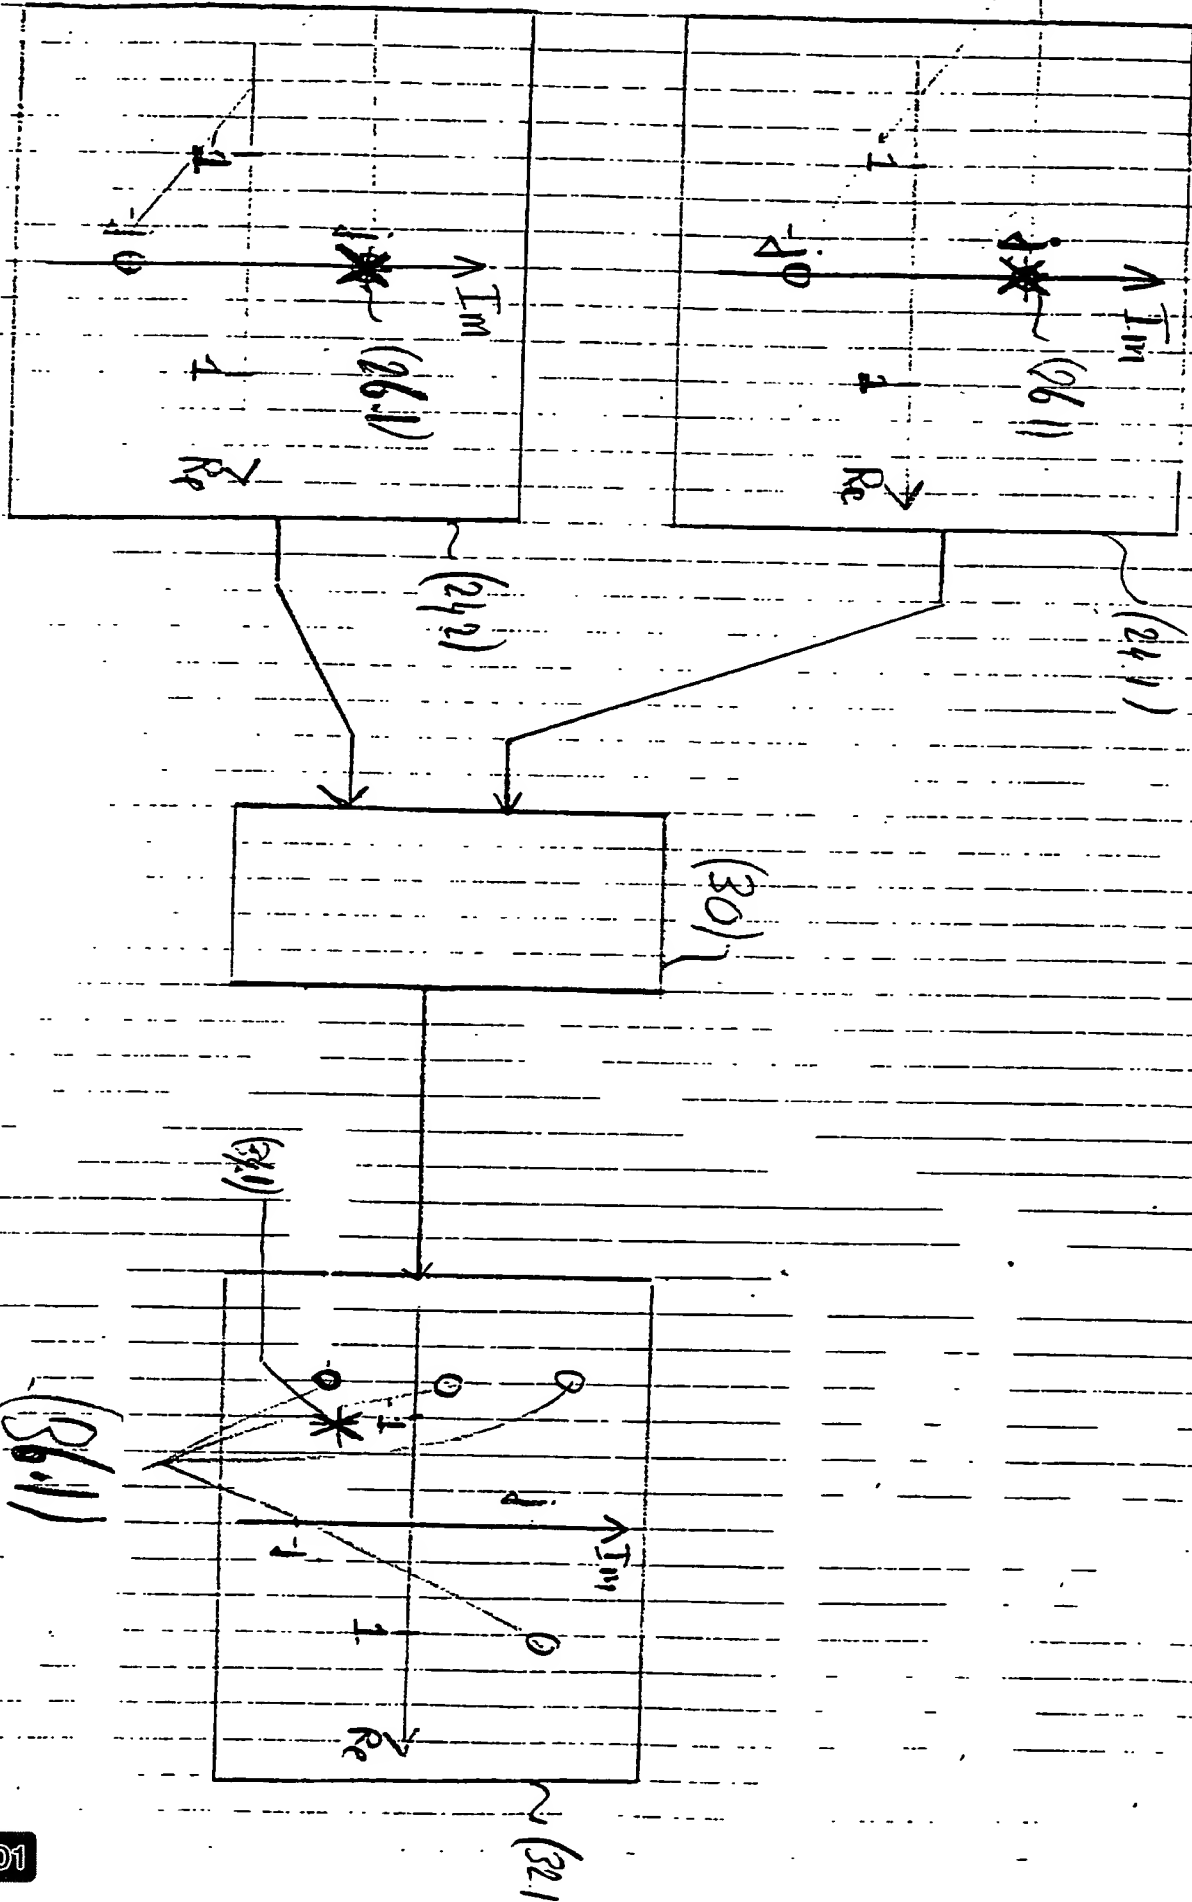


Figure 4

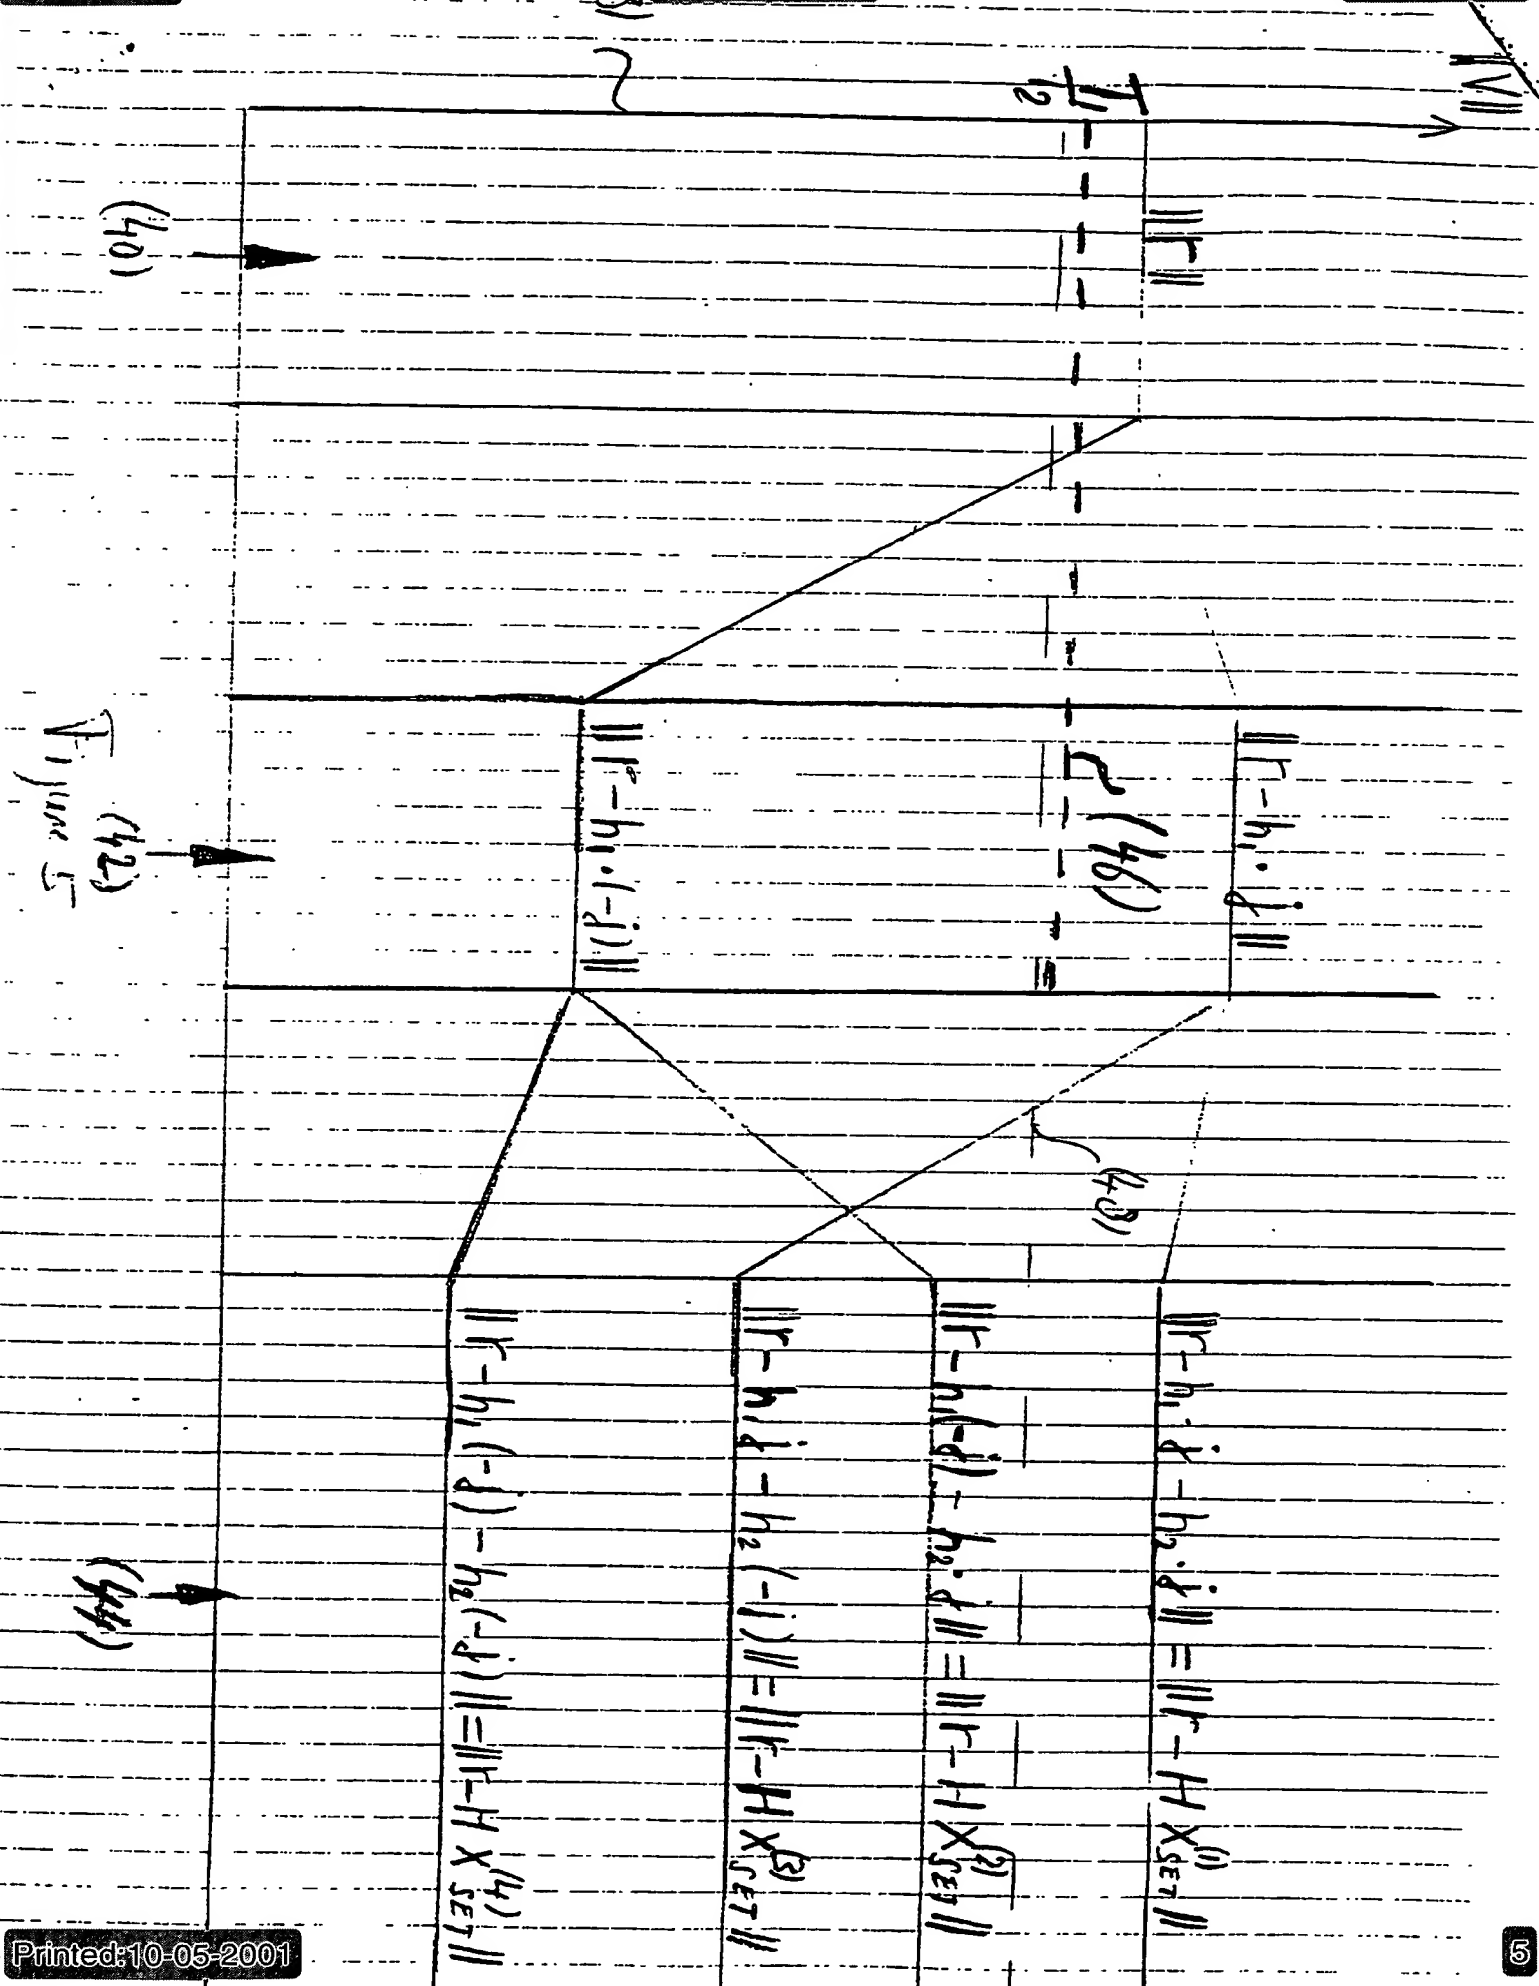

THIS PAGE BLANK (USPTO)